

PM5-3W
PM5-2W

PRESSOSTATI PER
AUTOCLAVE CON
MANOMETRO
E RACCORDO
INTEGRATI

PRESSURE SWITCHES
FOR WATER PUMPS
WITH INTEGRATED
PRESSURE GAUGE
AND 3 WAY FITTING



PM5-3W



PM5-2W

Caratteristiche

- Semplice e veloce connessione alla pompa e al vaso di espansione.
- **Manometro integrato.**
- Connessione in plastica con anello di rinforzo in acciaio che sostituisce il tradizionale raccordo in ottone.

Features


- Easy and fast connection to the pump and to the pressure tank.
- **Integrated pressure gauge.**
- **Robust plastic fitting with reinforced steel ring replacing common brass fitting.**

Optionals – esecuzioni speciali


- Tarature personalizzate.
- Coperchio con **interruttore on/off.**
- Contatti elettrici rinforzati per correnti fino a **25A.**
- Versione dotata di cavi elettrici di collegamento per linea e motore.

Optionals – special arrangements

- Customized settings.
- Cover with **on/off button.**
- Reinforced electric contacts up to **25A** current.
- Version with electric cables for line and motor connection.

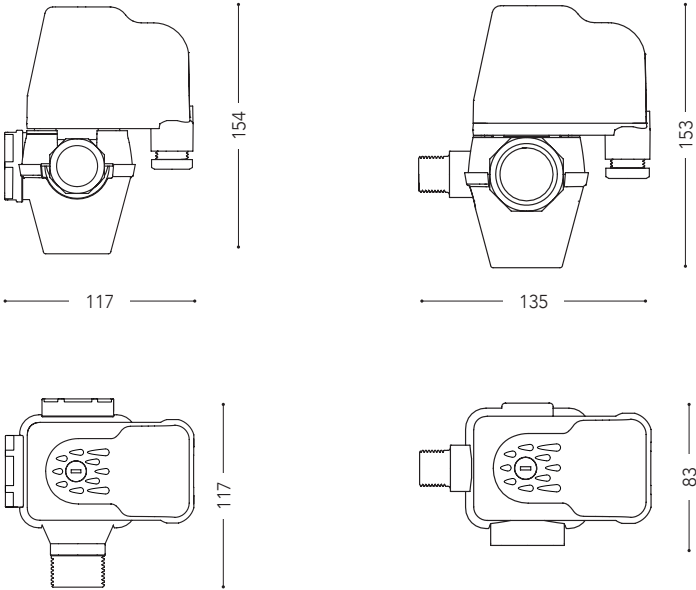


Installazione/Installation

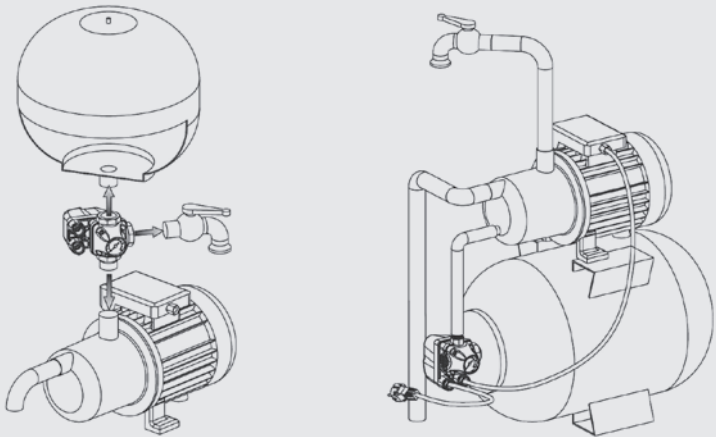


- ✓ RIVOLUZIONARIO
- ✓ PRATICO
- ✓ SOLIDO E COMPATTO

- ✓ INNOVATIVE
- ✓ HANDY
- ✓ ROBUST AND COMPACT

PM5-3W



PM5-2W



TECHNICAL DATA	PM5-3W	PM5-2W
Carico Load	250V~16(10)A	
Pressione max Max pressure	5 bar	
Connessioni Connections	1" M x 1" F x 1" F	1" F x 1/2" M
Manometro Pressure gauge	Ø 40 mm 0-6 bar / 0-86 PSI	
Temperatura del fluido max Max fluid temperature	55°C	